

Pre-assembled CT Terminals

Ready to install for your convenience
Let's connect.

www.weidmuller.com.au

**Install
ready!**

Cross connection sliders

Feed through terminals for metering



Test points

Lockout disconnects

Finger safe assembly

***Time saving, ready to install
and easy to order!***

Current transformer secondaries must always be connected to a load or short circuited to prevent a dangerous overvoltage situation. Weidmüller's pre-assembled CT Terminals provide the facility for shorting the output or for the connection of an external meter.

PACIFIC
AUTOMATION

AUTHORISED DISTRIBUTOR

www.pacificautomation.com.au


Weidmüller 

Available in 1-ph or 3-ph configurations ready to be installed directly into your switchboard

1-ph with test points




Order number:
WD-PMI-CTTERM-1P-T

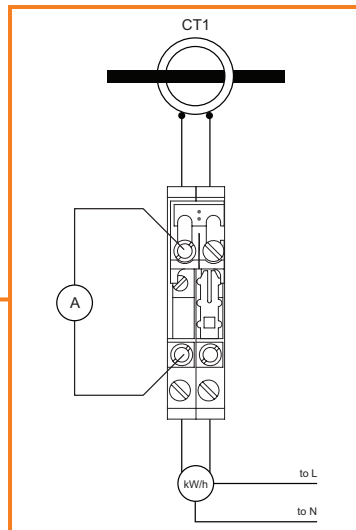

3-phase




Order number:
WD-PMI-CTTERM-3P

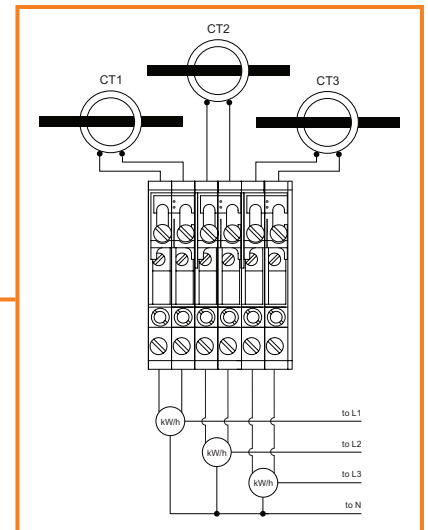

3-ph with test points




Order number:
WD-PMI-CTTERM-3P-T

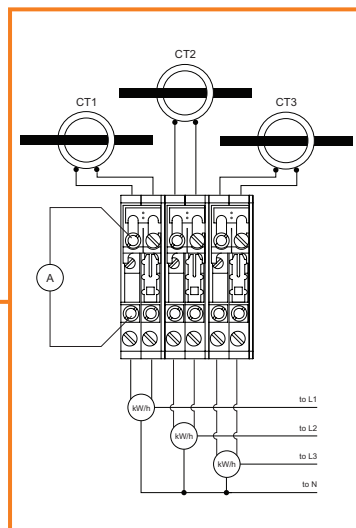

3-ph with neutral




Order number:
WD-PMI-CTTERM-3P-N

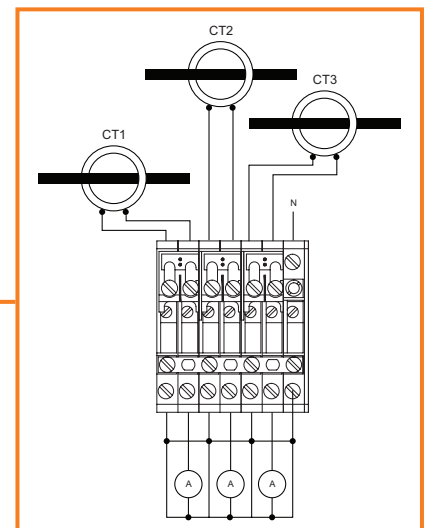

3-ph metering with test points



Order number:
WD-PMI-CTTERM-3P-TM

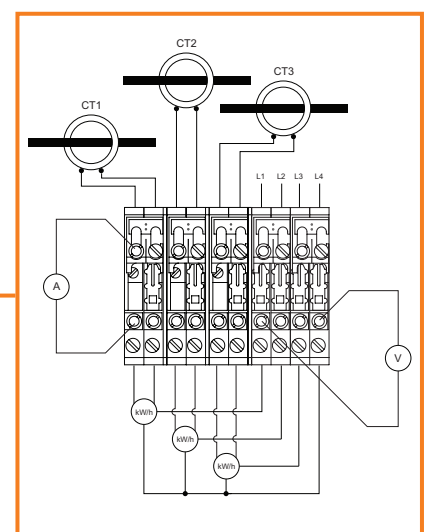

PACIFIC
AUTOMATION

Phone: 1300 881 876
Email: sales@pacificautomation.com.au
www.pacificautomation.com.au

Head Office
45 Solomon Road Jandakot WA 6164

Queensland
U10/6 Goodman Place Murarrie QLD 4172