

1) Optical axis receiver, 2) Optical axis emitter, 3) Operating voltage, 4) Light reception/limit area, 5) Sn, 6) rotatable 270°



**Basic features**

Approval/Conformity	CE
	cULus
	EAC
	WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	50K
Style	Square
	Connection can be rotated

**Electrical connection**

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

**Display/Operation**

Adjuster	Potentiometer 270°
Display	LED green: Power
	Limit range - LED yellow, flashing
	LED yellow: Light received
Setting	Rated switching distance (Sn)

Photoelectric Sensors  
**BOS 50K-PA-PR10-S4**  
Order Code: BOS01CR

**BALLUFF**

#### Electrical data

Load capacitance max. at Ue	7 µF
No-load current I <sub>o</sub> max. at Ue	50 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Protection class	II
Rated insulation voltage U <sub>i</sub>	250 V AC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Ready delay t <sub>v</sub> max.	200 ms
Residual current I <sub>r</sub> max.	10 µA
Ripple max. (% of U <sub>e</sub> )	10 %
Switching frequency	400 Hz
Turn-off delay t <sub>off</sub> max.	1.25 ms
Turn-on delay t <sub>on</sub> max.	1.25 ms
Utilization category	DC -13
Voltage drop U <sub>d</sub> max. at I <sub>e</sub>	2.5 V

#### Environmental conditions

Ambient temperature	-5...55 °C
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
Protection degree	IP67

#### Functional safety

MTTF (40 °C)	617 a
--------------	-------

#### Material

Housing material	PC ABS
Material sensing surface	Glass

#### Mechanical data

Dimension	28.5 x 80.5 x 62 mm
Mounting	Screw M5

#### Optical features

Ambient light max.	10000 Lux
Beam characteristic	Divergent
LED group per IEC 62471	Exempt Group
Light spot size	200 x 200 mm at 10 m
Light type	LED, red light
Polarizing filter	yes
Principle of optical operation	Retroreflective sensor
Switching function, optical	Light-on dark-on
Wave length	630 nm

#### Output/Interface

Switching output	PNP normally open (NO) PNP NC Pins 4-2
------------------	---

#### Range/Distance

Range	0...18 m
Rated operating distance S <sub>n</sub>	18 m Adjustable
Temperature drift max. (% of S <sub>r</sub> )	10 %

#### Remarks

Order accessories separately.

The sensor is functional again after the overload has been eliminated.


For additional information, refer to user's guide.

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.


#### Connector Drawings



Wiring Diagrams



Technical Drawings

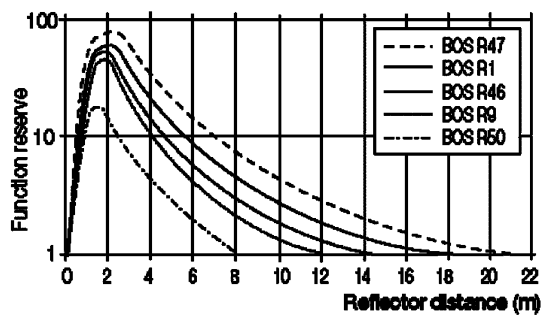

Opto Symbols

