




N32H DIGITAL METER OF D.C. CIRCUIT PARAMETERS

- Voltage measurement $\pm 600V$ (maximum range display $\pm 1200 V$), current measurement via shunt, power, energy and capacity measurement of d.c. circuits.
- Two-line LCD display with high contrast and built-in backlighting.
- Possibility of displaying the measured value and time simultaneously or an second measured value or unit (automatically displayed unit of measured quantity).
- Wide range of voltage measurement at the shunt input up to 1500 mV.
- High sampling frequency of measured signals.
- Programming parameters via buttons or RS-485 interface and free e-con software.
- 4 alarm outputs with signaling on led diodes, working in 7 different modes (option).
- Pulse output to control energy consumption.
- Conversion of any measured value into an analog signal 0/4...20 mA or 0...10V (option).
- Memory of minimal and maximal values for all measured quantities.
- Automatic voltage measurement compensation function.

EXAMPLE OF APPLICATION

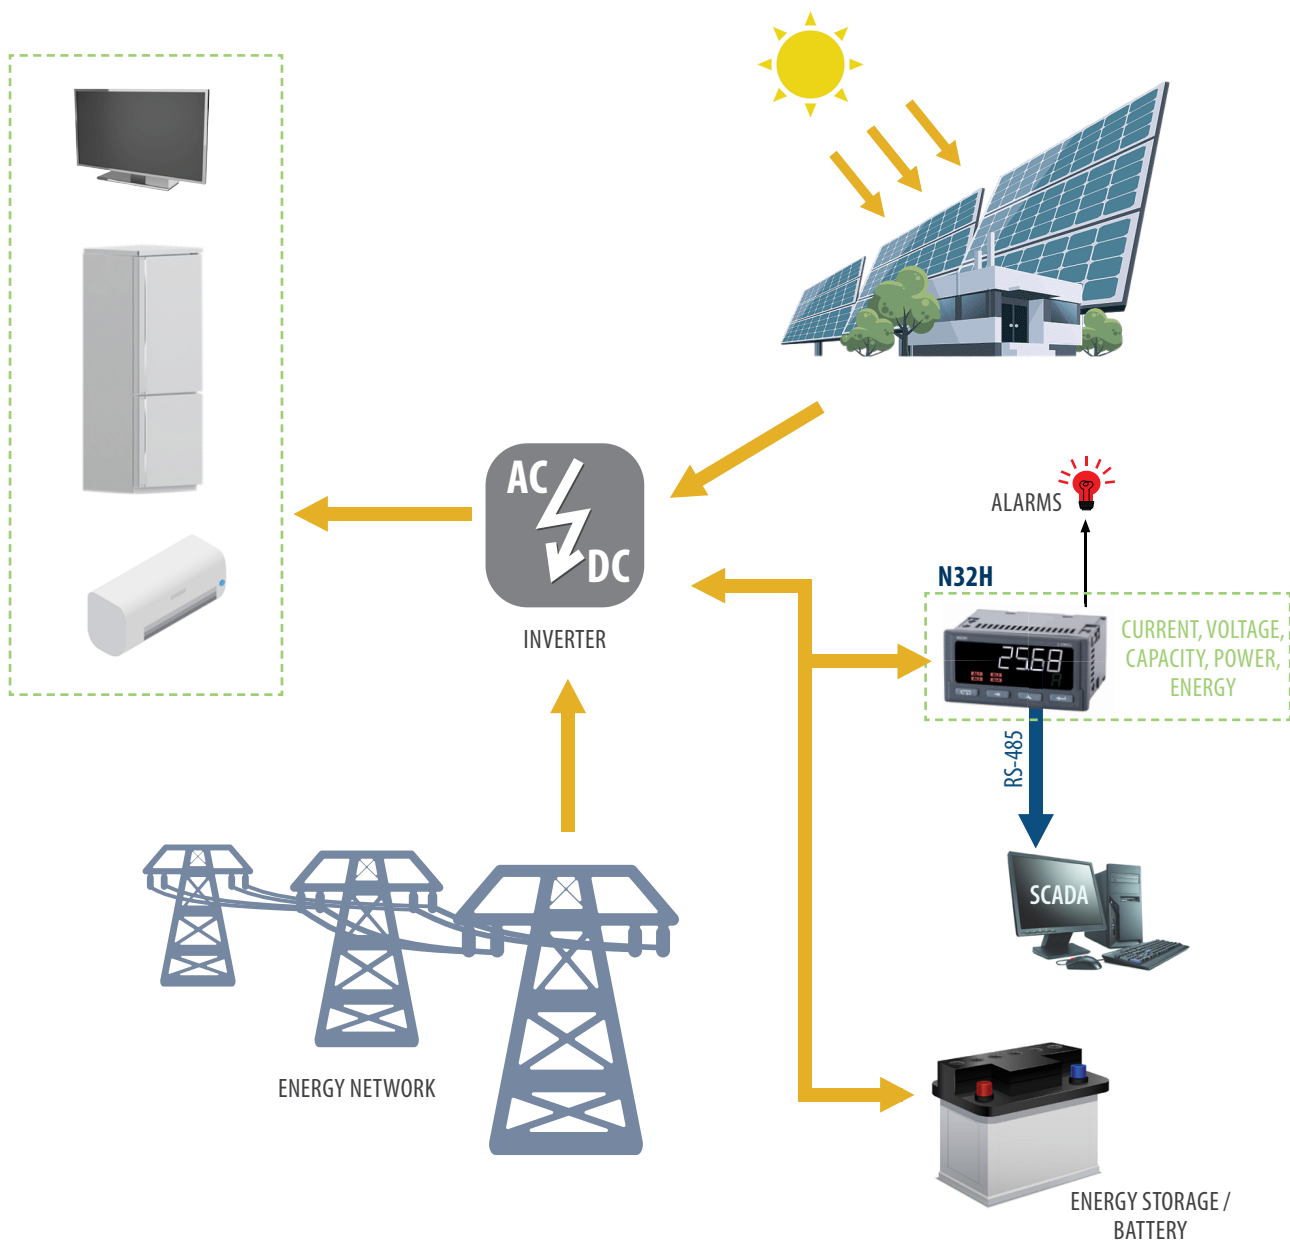

N32H - DIGITAL METER OF D.C. CIRCUIT PARAMETERS

| FEATURES | INPUTS | OUTPUTS | GALVANIC ISOLATION |
|----------|--------|---------|--------------------|
| | | | |


MEASURED QUANTITIES AND CALCULATED BY THE METER

- d.c. voltage U
- d.c. current I (indirectly through the shunt)
- d.c. power P
- averaged voltage in a given range U_{AV}
- averaged current in a given range I_{AV}
- power averaged in a given range P_{AV}
- capacity counter (accumulated current) CAP
- energy counter E
- maximum and minimum values in the given averaging period
- current time

DATA VISUALISATION



or

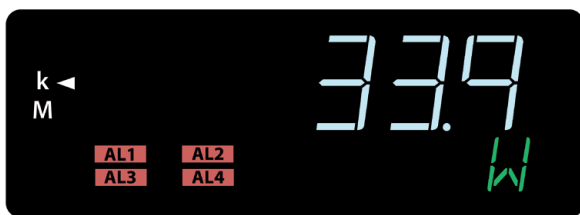

or




Two-line display.
Simultaneous preview of two measured values e.g. current and power.


Automatically displayed unit of measured value and symbol of multiplier kilo, mega.

Preview of current time on the bottom line of the display.
Real-time clock with automatic winter/summer time change function.

BIDIRECTIONAL MEASURING INPUT

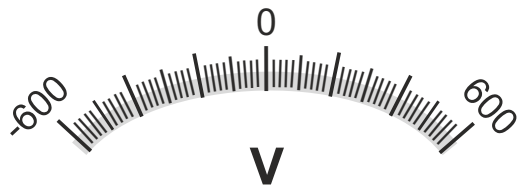

- 50 mV
- 60 mV
- 75 mV
- 100 mV
- 150 mV

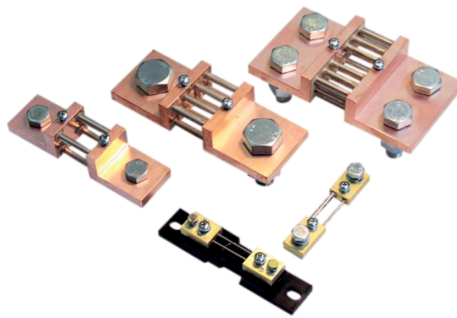


Bidirectional voltage measurement in a wide range of $\pm 600V$ (maximum indication range $\pm 1200V$) and bi-directional current measurement through a shunt. This function is useful, among others when monitoring the parameters of an energy storage system.

Universal input for measuring with any type of shunt with a wide voltage measurement range up to 1500 mV.


Automatic compensation of the voltage drop on the measuring shunt to support the correct measurements of voltage, power and energy in relation to the load.

ALARM FUNCTIONS

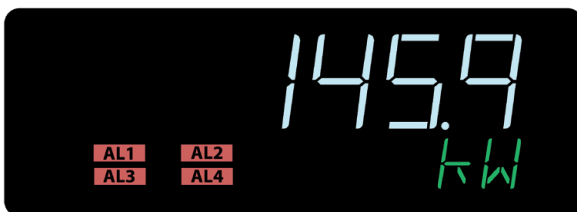

1 or 4 relay outputs with signaling on the display in the form of an active alarm number.

Each of the alarms can be configured to work in one of 7 modes, incl. REG mode for alarm control via RS-485 Modbus.


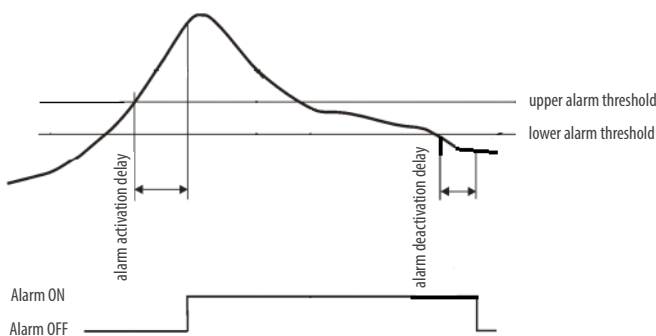


$t \geq$ time delay \rightarrow Alarm activated
For alarm operation both conditions (value and time delay) must be met

Programmable maintenance of alarm signaling. After the alarm event has ceased, the alarm status marker blinks on the display until it is deleted by the user.

Individually programmable parameters of switching on and switching off the alarm; this feature can be used to prevent „false“ alarms from occurring.

WALKING WINDOW ALGORITHM

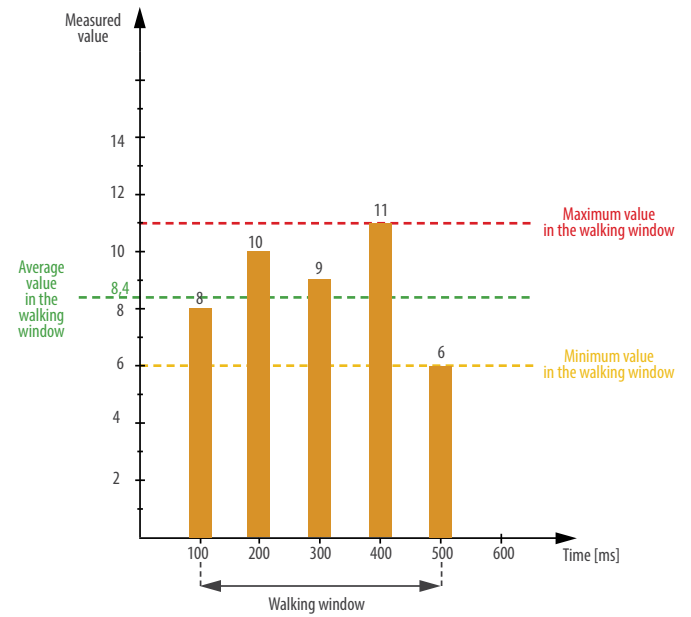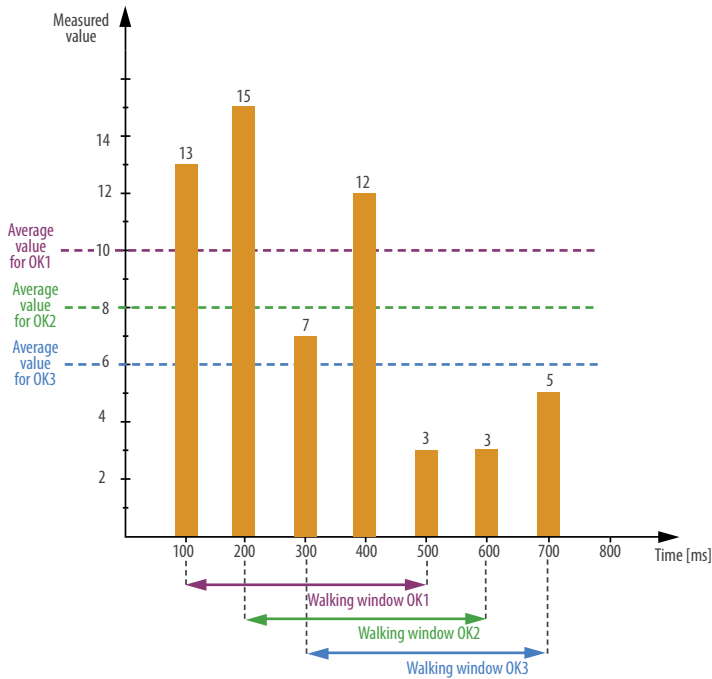

Programmed averaging time according to the walking window algorithm with a given averaging time. This function is useful for measuring signals with high dynamics.

Possibility to measure the average, minimum or maximum value during the walking window.

TECHNICAL DATA

INPUTS AND MEASURING RANGES

| Measured quantity | Nominal range | Maximum range of indications | Class |
|--------------------------------|---------------|--------------------------------------|----------------------|
| Voltages | 50 V | -75...75 V | 0.1 |
| | 100 V | -160...160 V | |
| | 150 V | -300...300 V | |
| | 300 V | -600...600 V | |
| | 600 V | -1200...1200 V | |
| Currents (shunt voltage) | | 60000...60000 A (-1500...1500 mV) | |
| Capacity (accumulated current) | | -99999...999999 MAh | ±0.5 % |
| Power | | all ranges | 0.2 + shunt class |
| Energy | | -99999...999999 MWh | ±0.5 % + shunt class |

OUTPUTS

| Output type | Properties | Remarks |
|---------------|---|--|
| Relay output | <ul style="list-style-type: none"> 1 NO contact, load capacity 5A / 250V a.c.; 5A / 30V d.c. 3 relays with a changeover contact, load capacity 6A / 250V a.c.; 6A / 30V d.c.; 0,15A / 250V d.c. | |
| Analog output | <ul style="list-style-type: none"> programmable current 0/4...20 mA, load resistant ≤ 500 Ω programmable voltage 0...10 V, load resistant ≥ 500 Ω | Analog output error: 0.1% of the set range Additional error from temperature changes: 50% of class/10K |
| OC output | OC type, passive npn, 30 V d.c./30 mA | voltage free output |

DIGITAL INTERFACE

| Interface type | Transmission protocol | Mode | Baud rate |
|----------------|-----------------------|--------------------|---|
| RS-485 | MODBUS RTU | 8N2, 8E1, 8O1, 8N1 | 2.4, 4.8, 9.6, 14.4, 19.2, 28.8, 38.4, 57.6, 115.2 kbit/s |

EXTERNAL FEATURES

| | | |
|-------------------------------------|--|--|
| Readout field | 1 row 6-digit; digits height 12.85 mm 2 rows: 5-digit; digits height 7.5 mm | high contrast LCD with backlight and programmable measuring unit |
| Weight | < 0.25 kg | |
| Overall dimensions | 96 x 48 x 93 mm | mounting hole: $92^{+0.6} \times 45^{+0.6}$ mm |
| Protection grade (acc. to EN 60529) | from frontal side: IP65 | from terminal side: IP 10 |


RATED OPERATING CONDITIONS

| | | |
|-------------------------|--|--------------------------|
| Supply voltage | 85...253 V a.c. (40...400 Hz), 90...300 V d.c. 20...40 V a.c. (45...65 Hz) / 20...60 V d.c. | power consumption < 6 VA |
| Temperature | ambient: -25...23...55°C | storage: -30...70°C |
| Relative humidity | 25...95% | without condensation |
| Operating position | any | |
| External magnetic field | 0...400 A/m | |


SAFETY AND COMPABILITY REQUIREMENTS

| | | |
|--------------------------------|--|----------------------|
| Electromagnetic compatibility | noise immunity | acc. to EN 61000-6-2 |
| | noise emissions | acc. to EN 61000-6-4 |
| Isolation between circuits | basic | acc. to EN 61010-1 |
| Pollution level | 2 | |
| Installation category | III | |
| Maximal phase-to-earth voltage | for supply circuits: 300 V for other circuits: 50 V | |
| Altitude a.s.l. | < 2000 m | |

CONNECTION DIAGRAMS

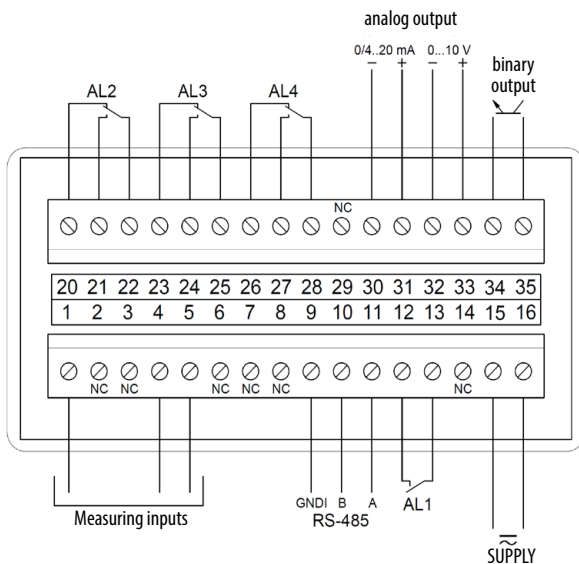

Description of signals on the connector strips

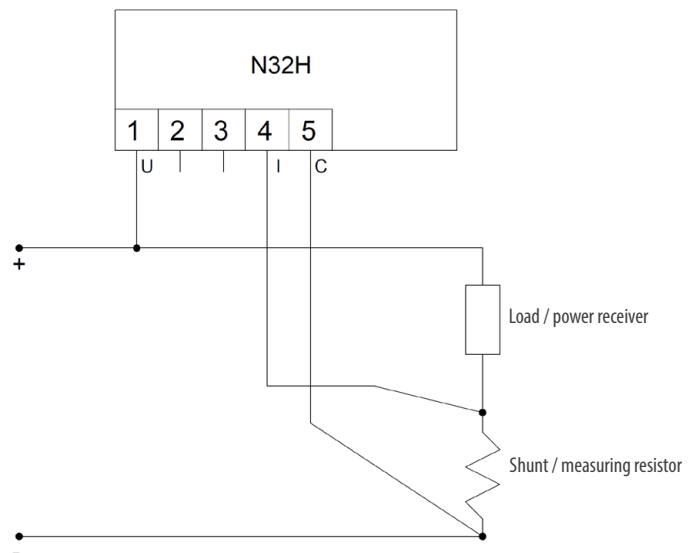

Meter connection

ORDERING CODE

| | | | | | |
|--|---|---------|---------|---|---|
| N32H | X | X | XXXXXXX | X | X |
| Supply: | | | | | |
| 85...253 V a.c., 90...300 V d.c. | 1 | | | | |
| 20..40 V a.c./ 20..60 V d.c. | 2 | | | | |
| Dodatkowe wyjścia: | | | | | |
| 1 relay output, RS-485 | 1 | | | | |
| 4 relay outputs, RS-485 | 2 | | | | |
| 4 relay outputs, RS-485, 1 analog output | 3 | | | | |
| Version: | | | | | |
| standard | | 000000 | | | |
| custom-made* | | XXXXXXX | | | |
| Language: | | | | | |
| Polish/English | | | | M | |
| Acceptance tests: | | | | | |
| without additional quality requirements | | | | | 0 |
| with an extra quality inspection certificate | | | | | 1 |
| with an extra calibration certificate | | | | | 2 |
| acc. to customer's request | | | | | X |

ORDERING EXAMPLE:

N32H130000000M0 means N32H meter with supply 85...253 V a.c., 90...300 V d.c. with 4 relay outputs, RS-485 interface and 1 analog output, in standard version, polish-english language version, without additional quality requirements.

* only after agreeing with the manufacturer

