



Extract from our online catalogue:

nero-25/WK/CE

Current to: 2023-11-13



Ultrasonic proximity switch nero in M18 plastic sleeve with 4 detection ranges

## HIGHLIGHTS

- › Variant with 90° angled head
- › UL Listed to Canadian and US safety standards

## BASICS

- › 1 switching output, pnp or npn basis
- › Analogue output 4–20 mA or 0–10 V
- › 4 detection ranges with a measurement range of 20 mm to 1.3 m
- › microsonic Teach-in on pin 2
- › 0.2 mm resolution
- › 10–30 V operating voltage

# Description

## nero ultrasonic proximity switches

are available in a M18 plastic sleeve. In addition to the axial beam direction variant, there is also a housing variant with a 90° angled head and radial beam direction.

The ultrasonic proximity switches detect contactless and reliable objects with four detection ranges from 20 mm to 1.3 m.

### For the nero sensor family

there are 2 output stages and 4 detection ranges available:



1 switching output with pnp or npn switching technology




1 analogue output 4–20 mA or 0–10 V

### Sensors with switching output have three operating modes:

- › Single switching point
- › Two-way reflective barrier
- › Window mode

### Teach-in of a single switching point

- › Place object to be detected (1) at the desired distance
- › Apply +U<sub>B</sub> to pin 2 for about 3 seconds
- › Then apply +U<sub>B</sub> to pin 2 again for about 1 second

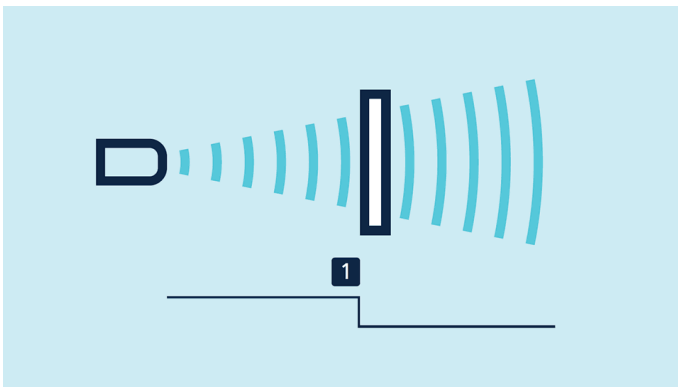


*Teach-in of a switching point*

### Teach-in of a two-way reflective barrier

with a fixed reflector


- › Apply  $+U_B$  to pin 2 for about 3 seconds
- › Then apply  $+U_B$  to pin 2 again for about 10 seconds

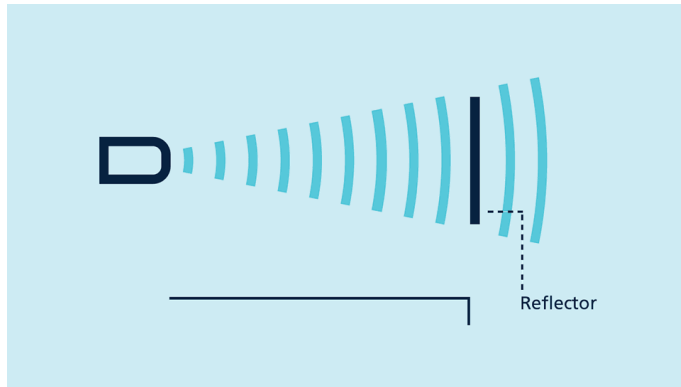

*Teach-in of a two-way reflective barrier*

#### For configuration of a window

- › Place object at the near edge of the window (1)
- › Apply  $+U_B$  to pin 2 for about 3 seconds
- › Then move the object to the far edge of the window (2)
- › Then apply  $+U_B$  to pin 2 again for about 1 second

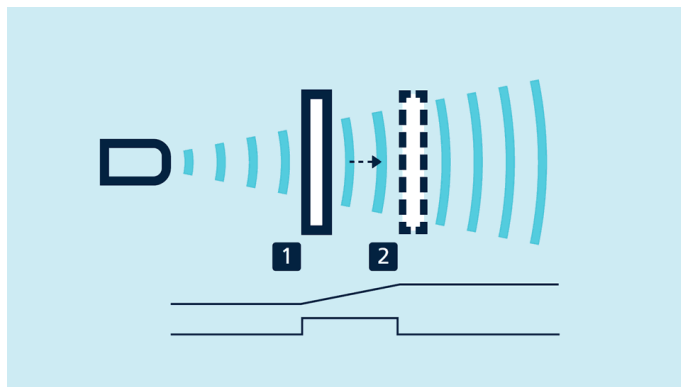

*Teach-in of an analogue characteristic or a window with two switching points*

#### NCC/NOG


and rising/falling analogue characteristic curve can also be set via pin 2.

#### One green and one yellow LED


indicate the state of the output and support microsonic Teach-in.

# nero-25/WK/CE

## scale drawing



## detection zone

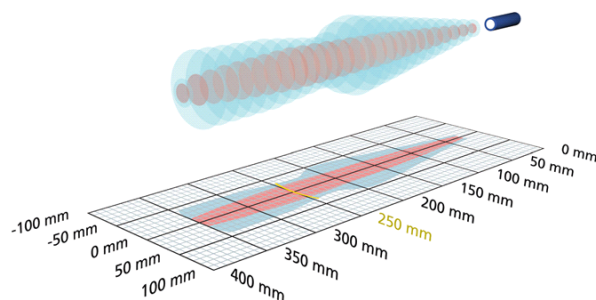

1 x npn



350 mm

measuring range	30 - 350 mm
design	cylindrical M18
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	90° angular head UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution	0.20 mm
reproducibility	± 0.15 %
accuracy	temperature drift 0.17 %/K

## electrical data

operating voltage $U_B$	10 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 40 mA
type of connection	4-pin M12 initiator plug

# nero-25/WK/CE

## outputs

output 1	Schaltausgang npn: $I_{\max} = 200 \text{ mA}$ ( $-U_B+2V$ )
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	Teach-in input
---------	----------------

## housing


material	PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
max. tightening torque of nuts	1 Nm
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	20 g

## technical features/characteristics

temperature compensation	no
controls	control input
scope for settings	Teach-in
Synchronisation	no
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status
particularities	90° angular head UL Listed

# nero-25/WK/CE

## pin assignment

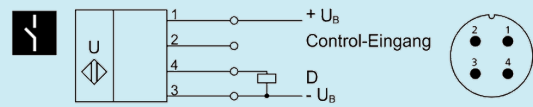

order no.

nero-25/WK/CE

The content of this document is subject to technical changes.  
Specifications in this document are presented in a descriptive way  
only. They do not warrant any product features.