

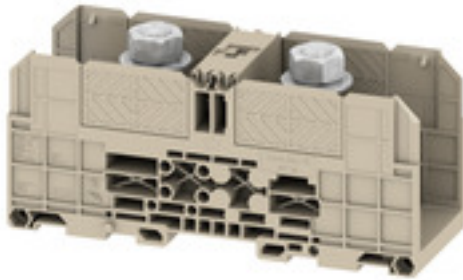
WFF 185**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Klippon® Connect with stud Technology**

Our stud terminals are an established, robust connection alternative for particularly harsh environments. The extensive accessories and quality workmanship ensure high productivity in planning and installation – and sustainable safety in operation..

General ordering data

Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 185 mm ² , Threaded stud connection
Order No.	1028600000
Type	WFF 185
GTIN (EAN)	4008190044091
Qty.	4 pc(s).

Creation date 03 February 2022 06:12:20 CET

Catalogue status 28.01.2022 / We reserve the right to make technical changes.

WFF 185

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	77.5 mm	Depth (inches)	3.051 inch
Depth including DIN rail	87 mm	Height	163 mm
Height (inches)	6.417 inch	Width	55 mm
Width (inches)	2.165 inch	Weight	438.25 g
Net weight	411.205 g		

Temperatures

Storage temperature		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	-25 °C...55 °C		
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

Rating data IECEx/ATEX

Certificate No. (IECEX)	IECEXKEM07.0053U	Max. voltage (IECEX)	1100 V
Current (IECEX)	307 A	Wire cross section max. (IECEX)	185 mm ²
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
Ex 2014/34/EU label	II 2 G D		Ex eb II C Gb

System specifications

End cover plate required	Yes	Number of levels	1
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35

Additional technical data

Explosion-tested version	Yes	Number of similar terminals	1
Open sides	closed	Type of mounting	Snap-on

CSA rating data

Certificate No. (CSA)	200039-1244019	Current size C (CSA)	360 A
Current size D (CSA)	5 A	Voltage size C (CSA)	600 V
Voltage size D (CSA)	600 V	Wire cross section max. (CSA)	500 kcmil
Wire cross section min. (CSA)	8 AWG		

Conductors for clamping (rated connection)

2 x cable lugs DIN 46 234	10...185 mm ²	2 x cable lugs DIN 46 235	25...185 mm ²
Cable lug to DIN 46234	10...240 mm ²	Cable lug to DIN 46235	25...240 mm ²
Clamping range, max.	240 mm ²	Clamping range, min.	10 mm ²
Number of connections	2	Stud size for spade connection	M 12
Tightening torque, max.	31 Nm	Tightening torque, min.	14 Nm
Type of connection	Threaded stud connection		

Creation date 03 February 2022 06:12:20 CET

Catalogue status 28.01.2022 / We reserve the right to make technical changes.

2

WFF 185

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions

TS 15 offset 13.5 mm

General

Rail TS 35 Standards IEC 60947-7-1

Rating data

Rated cross-section	185 mm ²	Rated voltage	1,000 V
Rated DC voltage	1,500 V DC	Rated current	353 A
Current at maximum wires	415 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	0.09 mΩ	Rated impulse withstand voltage	8 kV
Power loss in accordance with IEC 60947-7-x	11.3 W	Pollution severity	3

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	500 kcmil
Conductor size Factory wiring min. (UR)	8 AWG	Conductor size Field wiring max. (UR)	500 AWG
Conductor size Field wiring min. (UR)	8 AWG	Current size C (UR)	380 A
Voltage size C (UR)	1000 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

Approvals

Approvals



ROHS Conform
 UL File Number Search E60693

WFF 185

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	Attestation of Conformity CB Certificate EAC certificate DNVGL certificate MARITREG Certificate POLSKIREJ certificate CCC Ex Certificate ATEX Certificate IECEX Certificate CE Declaration of Conformity CE Declaration of Conformity all terminals
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Cross Connection Guide StorageConditionsTerminalBlocks WFF range for 1500 VDC applications DIRECT MOUNTING WFF TERMINAL BLOCKS NTI WFF 185
Catalogues	Catalogues in PDF-format
Brochures	