

1) Optical axis receiver, 2) Optical axis emitter, 3) rotatable 270°, 4) Power/short-circuit, 5) Output function/Error, 6) Sn



IND. CONT. EQ.
 81U2
 Class 2 Type 1



Basic features

Approval/Conformity	CE cULus EAC WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	50K
Style	Square Connection can be rotated

Display/Operation

Adjuster	10-turn potentiometer
Display	Output function- LED yellow LED green: Power Error - LED yellow, flashing Short circuit - LED green, flashing
Setting	Rated switching distance (Sn)

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.1 μ F
No-load current I _o max. at Ue	50 mA
Operating voltage U _b	10...30 VDC
Protection class	II
Rated insulation voltage U _i	250 V AC
Rated operating current I _e	100 mA
Rated operating voltage U _e DC	24 V
Ready delay t _v max.	300 ms
Residual current I _r max.	10 μ A
Ripple max. (% of U _e)	10 %
Switching frequency	500 Hz
Turn-off delay t _{off} max.	1 ms
Turn-on delay t _{on} max.	1 ms
Utilization category	DC -13
Voltage drop U _d max. at I _e	2.5 V

Environmental conditions

Ambient temperature	-10...60 °C
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
Protection degree	IP67

Functional safety

MTTF (40 °C) 219 a

Material

Housing material PC ABS
 Material sensing surface Glass

Mechanical data

Dimension 28.5 x 80.5 x 62 mm
 Distance deviation 6 % max. (% of Sr) 25.0 %
 Mounting Screw M5

Optical features

Ambient light max. 10000 Lux
 Beam characteristic Divergent
 LED group per IEC 62471 Exempt Group
 Light spot size 60 x 60 mm at Sr
 Light type LED, red light
 Principle of optical operation Diffuse sensor, triangulation
 Special optical feature Background suppression
 Switching function, optical Light/dark switching
 Wave length 630 nm

Output/Interface

Switching output PNP normally open (NO)
 PNP NC Pins 4-2

Range/Distance

Distance deviation 18 % max. (% of Sr) 8 %
 Hysteresis H max. (% of Sr) 5.0 %
 Range 200...2000 mm
 Rated operating distance S_n 2 m Adjustable
 Repeat accuracy max. (% of Sr) 5.0 %
 Temperature drift max. (% of Sr) 10 %

Remarks


The sensor is functional again after the overload has been eliminated.
 Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.
 Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.
 For additional information, refer to user's guide.
 Order accessories separately.
 For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


Connector Drawings



Wiring Diagrams



Technical Drawings

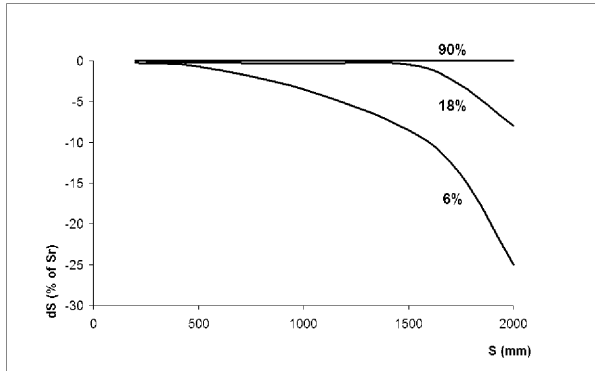

Opto Symbols

