

Q70NSN Xenon Lamp Strobe Signal Lights

ADVANTAGES

- Ø70mm xenon lamp strobe signal lights.
- High efficiency strobe light that offers excellent outdoor visibility and long-distance signal light luminance close to natural light.
- Lamp connector fastening structure allows for convenient lamp replacement.
- Bottom nut base allows for convenient mounting.
- Flashing rate: 60-80flashes/min
- Materials: Lens-PC, Housing-ABS
- Ambient operating temperature: -40°C to +50°C
- Protection rating: IP66



SPECIFICATIONS

Model number	Voltage	Current	Certificates	Weight	Color
Q70NSN	DC12V-80V	Max. 0.262A	-	0.188kg	Red
	AC110V	Max. 0.050A		0.191kg	Amber Green Blue




WIRING INSTRUCTION

- External power line standard: UL1015 AWG18(0.75sq)×2C 400mm
- Product can be wired regardless of polarity



TECHNICAL DIAGRAM

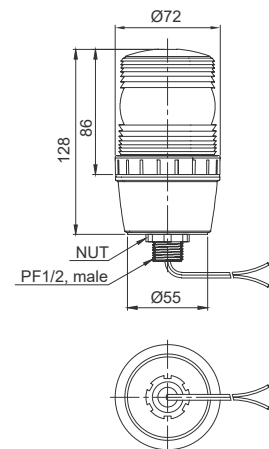

ORDERING SPECIFICATION

Q70NSN MODEL NUMBER	12/80 VOLTAGE	R COLOR
Q70NSN	<ul style="list-style-type: none"> • 12/80 = DC12V - 80V • 110 = AC110V 	<ul style="list-style-type: none"> • R = Red • A = Amber • G = Green • B = Blue

GET IN TOUCH

1300 881 876 sales@pacificautomation.com.au
pacificautomation.com.au

