

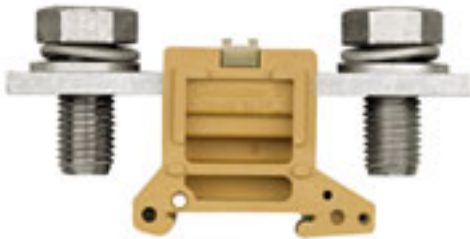
SAKG 54/35 II**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	SAK Series, Feed-through terminal, Rated cross-section: 240 mm ² , Screw connection, medium yellow, Direct mounting
Order No.	0638 120000
Type	SAKG 54/35 II
GTIN (EAN)	4008 190068646
Qty.	5 pc(s).

Creation date 03 February 2022 03:08:15 CET

Catalogue status 28.01.2022 / We reserve the right to make technical changes.

SAKG 54/35 II

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	60.5 mm	Depth (inches)	2.382 inch
Height	122 mm	Height (inches)	4.803 inch
Width	54 mm	Width (inches)	2.126 inch
Net weight	587.6 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	Stud terminal	End cover plate required	Yes
Number of levels	1	Number of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Rail	TS 35

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	Open
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	12400-199	Current size C (CSA)	600 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	500 kcmil
Wire cross section min. (CSA)	300 kcmil		

Conductors for clamping (rated connection)

Clamping range, max.	240 mm ²	Clamping range, min.	10 mm ²
Clamping screw	M 16	Connection direction	on side
Number of connections	1	Tightening torque, max.	60 Nm
Tightening torque, min.	25 Nm	Type of connection	Screw connection
Wire connection cross section AWG, max.	kcmil 500	Wire connection cross section AWG, min.	kcmil 300

General

Installation advice	Direct mounting	Rail	TS 35
Standards	IEC 60947-7-1	Wire connection cross section AWG, max.	kcmil 500
Wire connection cross section AWG, min.	kcmil 300		

Creation date 03 February 2022 03:08:15 CET

Catalogue status 28.01.2022 / We reserve the right to make technical changes.

2

SAKG 54/35 II

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rating data

Rated cross-section	240 mm ²	Rated voltage	1,000 V
Rated current	415 A	Current at maximum wires	415 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	0.08 mΩ
Rated impulse withstand voltage	8 kV	Power loss in accordance with IEC 60947-7-x	13.28 W
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	500 kcmil
Conductor size Factory wiring min. (UR)	300 kcmil	Conductor size Field wiring max. (UR)	500 kcmil
Conductor size Field wiring min. (UR)	300 kcmil	Current size C (UR)	380 A
Voltage size C (UR)	600 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate MARITREG Certificate Declaration of Conformity CE Declaration of Conformity all terminals
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format